

## PRODUCT SPECIFICATION



### GLSF-1324-40D(I)

2.5Gb/s Duplex LC, 1310nm DFB-LD LR 40km SFP Transceiver

#### ■ Features:

- ★ Up to 2.5Gb/s Data Links
- ★ Hot-Pluggable
- ★ 1310nm DFB laser transmitter
- ★ Duplex LC connector
- ★ Up to 40 km on 9/125μm SMF
- ★ Single +3.3V Power Supply
- ★ Monitoring Interface Compliant with SFF-8472
- ★ Low power dissipation <1.5W typically
- ★ Industrial /Extended/ Commercial operating temperature range: -40°C to 85°C/-5°C to 85°C/0°C to 70°C Version
- ★ RoHS compliant and Lead Free



#### ■ Applications:

- ★ SONET OC48/SDH STM-16
- ★ 1x/2x Fiber Channel
- ★ Other Optical Link

#### ■ Description:

GLight GLSF-1324-40D(I) Small Form Factor Pluggable (SFP) Transceiver is a high performance, cost effective module which has a Duplex LC optics interface, Standard AC coupled CML for high speed signal and LVTTTL control and monitor signals. The receiver section uses a Super Tia receiver and the transmitter uses 1310 nm DFB laser, up to 16dB link budget ensure this module STM-16/OC-48 40km application.

## ■ Absolute Maximum Ratings

| Parameter           | Symbol   | Min. | Typical | Max. | Unit |
|---------------------|----------|------|---------|------|------|
| Storage Temperature | $T_S$    | -40  |         | +85  | °C   |
| Supply Voltage      | $V_{CC}$ | -0.5 |         | 4    | V    |
| Relative Humidity   | RH       | 0    |         | 85   | %    |

## ■ Recommended Operating Environment:

| Parameter                  | Symbol     | Min. | Typical | Max. | Unit |
|----------------------------|------------|------|---------|------|------|
| Case operating Temperature | Industrial | -40  |         | 85   | °C   |
|                            | Extended   | -5   |         | 85   |      |
|                            | Commercial | 0    |         | 70   |      |

## ■ Electrical Characteristics ( $T_{OP} = T_c$ , $V_{CC} = 3.135$ to $3.465$ Volts)

| Parameter  | Symbol         | Min.           | Typical | Max.           | Unit  | Note |
|--|----------------|----------------|---------|----------------|-------|------|
| Supply Voltage                                   | $V_{CC}$       | 3.14           | 3.30    | 3.47           | V     |      |
| Supply Current                                   | $I_{CC}$       |                |         | 300            | mA    |      |
| Inrush Current                                   | $I_{surge}$    |                |         | $I_{CC}+30$    | mA    |      |
| Maximum Power                                    | $P_{max}$      |                |         | 1.0            | W     |      |
| <b>Transmitter Section:</b>                      |                |                |         |                |       |      |
| Input differential impedance                     | $R_{in}$       | 90             | 100     | 110            |       |      |
| Single ended data input swing                    | $V_{in PP}$    | 200            |         | 1200           | mVp-p |      |
| Transmit Disable Voltage                         | $V_D$          | $V_{CC} - 1.3$ |         | $V_{CC}$       | V     | 2    |
| Transmit Enable Voltage                          | $V_{EN}$       | $V_{EE}$       |         | $V_{EE}+0.8$   | V     |      |
| Transmit Disable Assert Time                     | $T_{dessert}$  |                |         | 10             | us    |      |
| <b>Receiver Section:</b>                         |                |                |         |                |       |      |
| Single ended data output swing                   | $V_{out,pp}$   | 300            |         | 1000           | mv    | 3    |
| Data output rise time                            | $t_r$          |                |         | 260            | ps    | 4    |
| Data output fall time                            | $t_f$          |                |         | 260            | ps    | 4    |
| LOS Fault  | $V_{losfault}$ | $V_{CC} - 0.5$ |         | $V_{CC\_host}$ | V     | 5    |
| LOS Normal                                       | $V_{los norm}$ | $V_{EE}$       |         | $V_{EE}+0.5$   | V     | 5    |
| Power Supply Rejection                           | PSR            | 100            |         |                | mVpp  | 6    |
| Total Generated Transmitter Jitter(peak to peak) | $J_{RXp-p}$    |                |         | 0.07           | UI    |      |
| Total Generated Transmitter Jitter(rms)          | $J_{RXrms}$    |                |         | 0.007          | UI    |      |

Note:

1. AC coupled.
2. Or open circuit.
3. Into 100 ohm differential termination.
4. LOS is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.

## ■ Optical Parameters( $T_{OP} = T_c$ , $VCC = 3.135$ to $3.465$ Volts)

| Parameter  | Symbol  | Min. | Typical | Max.       | Unit | Note |
|--|---|------|---------|------------|------|------|
| <b>Transmitter Section:</b>                          |   |      |         |            |      |      |
| Center Wavelength                                    | $\lambda_c$                                     | 1290 | 1310    | 1330       | nm   | 1    |
| Spectral Width(-20dB)                                | $\sigma$  |      |         | 1          | nm   |      |
| Side Mode Suppression Ratio                          | SMSR  | 30   |         |            | dB   |      |
| Optical Output Power                                 | $P_{out}$                                       | -2   |         | 3          | dBm  | 2    |
| Optical Rise/Fall Time                               | $t_r / t_f$                                     |      |         | 260        | ps   | 3    |
| Extinction Ratio                                     | ER  | 8.2  |         |            | dB   |      |
| Total Generated Transmitter Jitter (peak to peak)    | $J_{TXp-p}$                                     |      |         | 0.07       | UI   |      |
| Total Generated Transmitter Jitter (rms)             | $J_{TXrms}$                                     |      |         | 0.007      | UI   |      |
| Eye Mask for Optical Output                          | Compliant with IEEE802.3 (class 1 laser safety) |      |         |            |      |      |
| <b>Receiver Section:</b>                             |   |      |         |            |      |      |
| Optical Input Wavelength                             |   | 1100 |         | 1670       | nm   |      |
| Optical Input Power                                  | $P_{in}$  | -24  |         | -1         | dBm  | 5,6  |
| Receiver Overload                                    | $P_{ol}$  | -3   |         |            | dBm  | 5,6  |
| RX Sensitivity                                       | $Sen$   |      |         | -24        | dBm  | 5,6  |
| Receiver Reflectance                                 |   | 12   |         |            | dB   |      |
| RX_LOS Assert  | $LOS_A$   | -40  |         |            | dBm  |      |
| RX_LOS Deassert                                      | $LOS_D$   |      |         | -25        | dBm  |      |
| RX_LOS Hysteresis                                    | $LOS_H$   |      | 2       | 2.5        | dB   |      |
| <b>General Specifications</b>                        |   |      |         |            |      |      |
| Data Rate  | BR  | 2125 |         | 2500       | Mb/s |      |
| Bit Error Rate                                       | BER   |      |         | $10^{-12}$ |      |      |
| Max. Supported Link Length on 9/125 $\mu$ m SMF@2.5G | LMAX  |      |         | 40         | km   |      |
| Total System Budget                                  | LB  | 16   |         |            | dB   |      |

### Note

- Also specified to meet curves in FC-PI 13.0 Figures 18 and 19, which allow trade-off between wavelength spectral widths.
- Class 1 Laser Safety per FDA/CDRH and EN (IEC) 60825 regulations.
- Unfiltered, 20-80%. Complies with IEEE 802.3 (Gig. E), FC 1x and 2x eye masks when filtered.
- Measured with DJ-free data input signal. In actual application, output DJ will be the sum of input DJ and . DJ.
- Measured with conformance signals defined in FC-PI 13.0 specifications.
- Measured with PRBS 27-1at  $10^{-12}$  BER
- Dispersion limited per FC-PI Rev. 13
- Attenuation of 0.25dB/km is used for the link length calculations. Distances are indicative only. Please refer to the Optical Specifications in Table IV to calculate a more accurate link budget based on specific conditions in your application.

## Pin Assignment

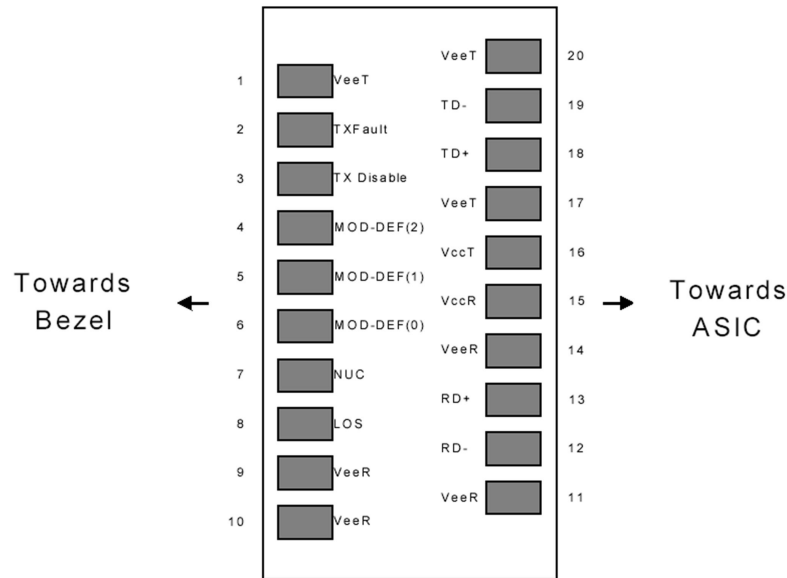


Diagram of Host Board Connector Block Pin Numbers and Names

## Pin Description

| Pin No | Name        | Function                     | Plug Seq | Notes |
|--------|-------------|------------------------------|----------|-------|
| 1      | VeeT        | Transmitter Ground           | 1        | 1     |
| 2      | TX Fault    | Transmitter Fault Indication | 3        |       |
| 3      | TX Disable  | Transmitter Disable          | 3        | 2     |
| 4      | MOD-DEF2    | Module Definition            | 2        | 3     |
| 5      | MOD-DEF1    | Module Definition 1          | 3        | 3     |
| 6      | MOD-DEF0    | Module Definition 0          | 3        | 3     |
| 7      | Rate Select | Not Connected                | 3        | 4     |
| 8      | LOS         | Loss of Signal               | 3        | 5     |
| 9      | VeeR        | Receiver Ground              | 1        | 1     |
| 10     | VeeR        | Receiver Ground              | 1        | 1     |
| 11     | VeeR        | Receiver Ground              |          | 1     |
| 12     | RD-         | Inv. Received Data Out       | 3        | 6     |
| 13     | RD+         | Received Data Out            | 3        | 6     |
| 14     | VeeR        | Receiver Ground              | 3        | 1     |
| 15     | VccR        | Receiver Power               | 2        | 1     |
| 16     | VccT        | Transmitter Power            | 2        |       |
| 17     | VeeT        | Transmitter Ground           | 1        |       |
| 18     | TD+         | Transmit Data In             | 3        | 6     |
| 19     | TD-         | Inv. Transmit In             | 3        | 6     |
| 20     | VeeT        | Transmitter Ground           | 1        |       |


**Notes:**

1. Circuit ground is internally isolated from chassis ground.
2. Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
3. Should be pulled up with 4.7k - 10 kohms on host board to a voltage between 2.0V and 3.6V. MOD\_DEF(0) pulls line low to indicate module is plugged in.
4. Rate select is not used
5. LOS is open collector output. Should be pulled up with 4.7k – 10 kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
6. AC Coupled

## ■ SFP Module EEPROM Information and Management

The SFP modules implement the 2-wire serial communication protocol as defined in the SFP-8472. The serial ID information of the SFP modules and Digital Diagnostic Monitor parameters can be accessed through the I<sup>2</sup>C interface at address A0h and A2h. The memory is mapped in Table 1. Detailed ID information (A0h) is listed in Table 2. And the DDM specification is at address A2h. For more details of the memory map and byte definitions, please refer to the SFF-8472, “Digital Diagnostic Monitoring Interface for Optical Transceivers”. The DDM parameters have been internally calibrated.

**Table 1.** Digital Diagnostic Memory Map (Specific Data Field Descriptions)

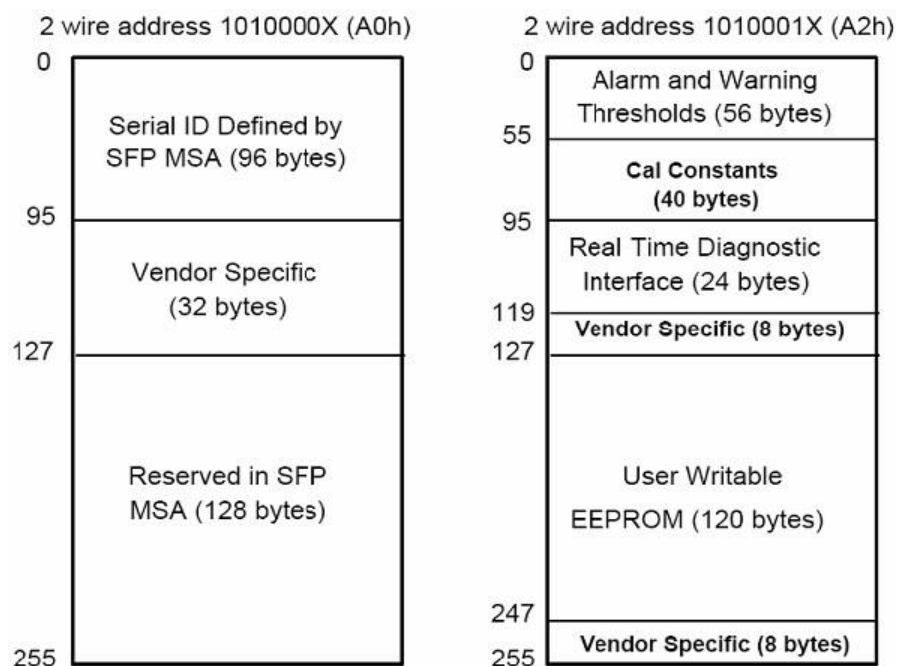

**Table 2.** EEPROM Serial ID Memory Contents(A0h)

| Data Address              | Length (Byte) | Name of Length   | Description and Contents   |
|---------------------------|---------------|------------------|--|
| Base ID Fields            |               |                  |  |
| 0                         | 1             | Identifier       | Type of Serial transceiver (03h=SFP)   |
| 1                         | 1             | Reserved         | Extended identifier of type serial transceiver (04h)   |
| 2                         | 1             | Connector        | Code of optical connector type (07=LC)   |
| 3-10                      | 8             | Transceiver      | SONET & Fiber Channel  |
| 11                        | 1             | Encoding         | NRZ (03h)  |
| 12                        | 1             | BR,Nominal       | Nominal baud rate, unit of 100Mbps   |
| 13                        | 1             | Reserved         | (0000h)  |
| 14                        | 1             | Length(9um,km)   | Link length supported for 9/125um fiber, units of km   |
| 15                        | 1             | Length(9um)      | Link length supported for 9/125um fiber, units of 100m   |
| 16                        | 1             | Length(50um)     | Link length supported for 50/125um fiber, units of 10m   |
| 17                        | 1             | Length(62.5um)   | Link length supported for 62.5/125um fiber, units of 10m   |
| 18                        | 1             | Length(Copper)   | Link length supported for copper, units of meters  |
| 19                        | 1             | Reserved         |  |
| 20-35                     | 16            | Vendor Name      | SFP vendor name:   |
| 36                        | 1             | Reserved         |  |
| 37-39                     | 3             | Vendor OUI       | SFP transceiver vendor OUI ID  |
| 40-55                     | 16            | Vendor PN        | Part Number: "GL-xxxxx" (ASCII)  |
| 56-59                     | 4             | Vendor rev       | Revision level for part number   |
| 60-61                     | 2             | Wavelength       | Laser wavelength   |
| 62                        | 1             | Reserved         |  |
| 63                        | 1             | CCID             | Least significant byte of sum of data in address 0-62  |
| Extended ID Fields        |               |                  |  |
| 64-65                     | 2             | Option           | Indicates which optical SFP signals are implemented(001Ah = LOS, TX_FAULT, TX_DISABLE all supported) |
| 66                        | 1             | BR, max          | Upper bit rate margin, units of %  |
| 67                        | 1             | BR, min          | Lower bit rate margin, units of %  |
| 68-83                     | 16            | Vendor SN        | Serial number (ASCII)  |
| 84-91                     | 8             | Date code        | Manufacturing date code  |
| 92                        | 1             | Diagnostic Type  | Diagnostics  |
| 93                        | 1             | Enhanced Options | Diagnostics  |
| 94                        | 1             | SFF-8472         | Diagnostics  |
| 95                        | 1             | CCEX             | Check code for the extended ID Fields (addresses 64 to 94)   |
| Vendor Specific ID Fields |               |                  |  |
| 96-127                    | 32            | Readable         | Vendor specific date, read only  |
| 128-255                   | 128           | Reserved         | Reserved for SFF-8079  |

## ■ Digital Diagnostic Monitor Characteristics

| Data Address | Parameter                        | Accuracy | Unit | Calibration |
|--------------|----------------------------------|----------|------|-------------|
| 96-97        | Transceiver Internal Temperature | ±3.0     | °C   | internal    |
| 98-99        | VCC3 Internal Supply Voltage     | ±0.1     | V    | internal    |
| 100-101      | Laser Bias Current               | ±10      | %    | internal    |
| 102-103      | Tx Output Power                  | ±3.0     | dBm  | internal    |
| 104-105      | Rx Input Power                   | ±3.0     | dBm  | internal    |

## ■ Regulatory Compliance


The transceiver complies with international Electromagnetic Compatibility (EMC) and international safety requirements and standards (see details in Table following).

|   |  |  |
|---|--|--|
| Electrostatic Discharge (ESD) to the Electrical Pins      | MIL-STD-883E<br>Method 3015.7                                      | Class 1(>1000 V)                       |
| Electrostatic Discharge (ESD) to the Duplex LC Receptacle | IEC 61000-4-2<br>GR-1089-CORE                                      | Compatible with standards              |
| Electromagnetic Interference (EMI)                        | FCC Part 15 Class B<br>EN55022 Class B (CISPR 22B)<br>VCCI Class B | Compatible with standards              |
| Laser Eye Safety  | FDA 21CFR 1040.10 and 1040.11<br>EN60950, EN (IEC) 60825-1,2       | Compatible with Class 1 laser product. |


## ■ Reference

1. IEEE Std 802.3, 2002 Edition, Clause 38, PMD Type 1000BASE-LX. IEEE Standards Department, 2002.
2. “Fibre Channel Physical and Signaling Interface (FC-PH, FC-PH2, FC-PH3)”. American National Standard for Information Systems.
3. “Fibre Channel Draft Physical Interface Specification (FC-PI 13.0)”. American National Standard for Information Systems.
4. Small Form-factor Pluggable (SFP) Transceiver Multi-source Agreement (MSA) September 14, 2000.

## ■ Recommended circuit & Mechanical Dimensions

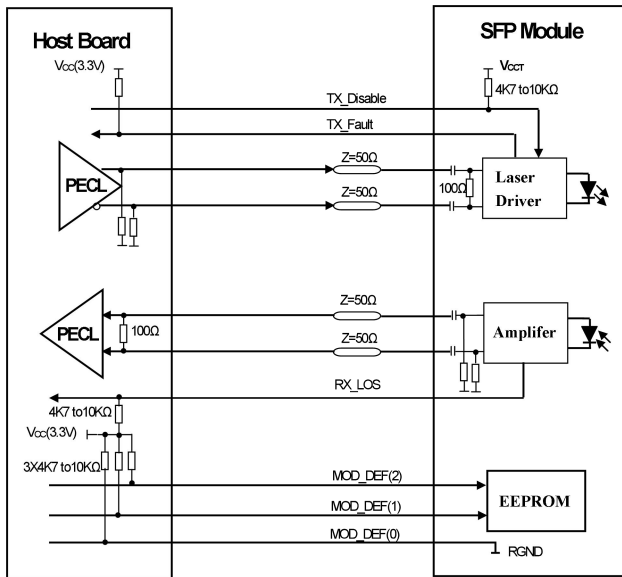

SFP Host Recommended Circuit

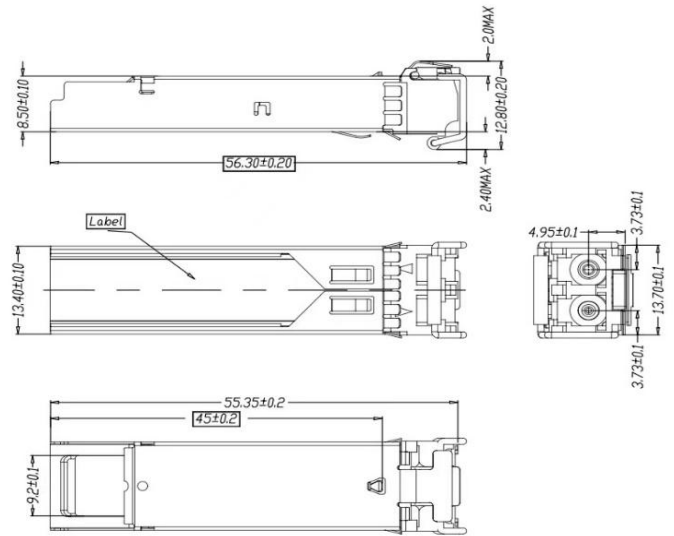

Mechanical Drawing

### Shenzhen GLight Communication Technology Co., Ltd.

Building 3, ChaoHuiLou Technology Industrial Park, No.119 Huating Road,  
Dalang Sub-district, Longhua District, Shenzhen, China

GLIGHT reserves the right to make changes to the products or information contained herein without notice.  
No liability is assumed as a result of their use or application.  
No rights under any patent accompany the sale of any such products or information.

Published by Shenzhen GLight Communication Technology Co., Ltd. Copyright © GLight Communication Technology Co., Ltd. All Rights Reserved.