

GLXP-2733B1-10D (I) GLXP-3327B1-10D (I)



Features:

- ✧ UP to 25.78Gb/s bi-directional data links
- ✧ Hot-Pluggable SFP28 footprint
- ✧ Duplex LC connector
- ✧ 1271nm DFB laser transmitter for

- ✧ 1331nm DFB laser transmitter for
- ✧ Up to 10km on 9/125m SMF
- ✧ 2-wire interface for management specifications compliant with SFF 8472 digital diagnostic monitoring interface for optical transceivers
- ✧ Power Supply :+3.3V
- ✧ Operating case temperature Range:
Commercial: 0~ 70°C Extended:-5~85°C
Industrial:-40~ 85°C
- ✧ RoHS compliant

Applications:

- ✧ 25GE LR
- ✧ eCPRI &CP

Part Number Ordering Information

GLXP-2733B1-10DI	SFP28 LR 10km BIDI optical transceiver with full real-time digital diagnostic monitoring ,1271nm Transmitter&1331nm Receiver,-40~85°C, 25GE
GLXP-3327B1-10DI	SFP28 LR 10km BIDI optical transceiver with full real-time digital diagnostic monitoring , 1331nm Transmitter&1271nm Receiver, -40~85°C, 25GE
GLXP-2733B1-10DE	SFP28 LR 10km BIDI optical transceiver with full real-time digital diagnostic monitoring ,1271nm Transmitter&1331nm Receiver,-5~85°C, 25GE
GLXP-3327B1-10DE	SFP28 LR 10km BIDI optical transceiver with full real-time digital diagnostic monitoring , 1331nm Transmitter&1271nm Receiver, -5~85°C, 25GE
GLXP-2733B1-10D	SFP28 LR 10km BIDI optical transceiver with full real-time digital diagnostic monitoring ,1271nm Transmitter&1331nm Receiver, 0~70°C, 25GE
GLXP-3327B1-10D	SFP28 LR 10km BIDI optical transceiver with full real-time digital diagnostic monitoring , 1331nm Transmitter&1271nm Receiver, 0~70°C, 25GE

Description:

GLight's GLXP-2733B1-10D (I)/GLXP-3327B1-10D(I) SFP28 transceivers are designed for use in Ethernet links up to 25.78 Gb/s data rate and up to 10 km link length. They are compliant SFF-8472 , and compatible with SFF-8432 and applicable portions of SFF-8431. The product is RoHS compliant and ead-free per Directive 2011/96/EU.

Pin Function Definitions

PIN #	Name	Function	Notes
1	VeeT	Module transmitter ground	1
2	Fault	Module transmitter Fault	2
3	Disable	Transmitter Disable; Turns off transmitter laser output	3
4	SDL	2 wire serial interface data input/output (SDA)	4
5	SCL	2 wire serial interface clock input (SCL)	4
6	MOD-ABS	Module Absent, connect to VeeR or VeeT in the module	2
7	RS0	Rate select0: module inputs and are pulled low to VeeT with > 30 kΩ resistors in the module.	
8	LOS	Receiver Loss of Signal Indication	
9	RS1	Rate select1: module inputs and are pulled low to VeeT with > 30 kΩ resistors in the module.	
10	VeeR	Module receiver ground	1
11	VeeR	Module receiver ground	1
12	RD-	Receiver inverted data out put	
13	RD+	Receiver non-inverted data out put	
14	VeeR	Module receiver ground	1
15	VccR	Module receiver 3.3V supply	
16	VccT	Module transmitter 3.3V supply	
17	VeeT	Module transmitter ground	1
18	TD+	Transmitter non-inverted data out put	
19	TD-	Transmitter inverted data out put	
20	VeeT	Module transmitter ground	1

Note:

- 1.The module ground pins shall be isolated from the module case.
- 2.This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host_Vcc on the hostboard.
- 3.This pin shall be pulled up with 4.7K-10Kohms to VccT in the module.
- 4.This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host_Vcc on the host board.

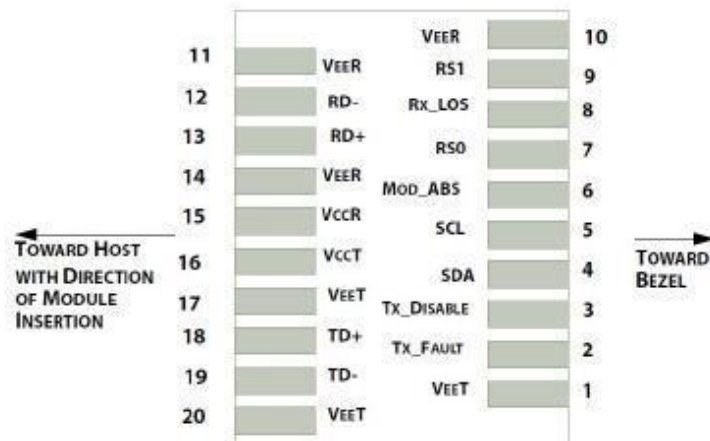


Diagram of Host Board Connector Block Pin Numbers and Names

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Storage Temperature	T _s	-40		+85	°C	
Case Operating Temperature	T _A	0		+70	°C	
		-5		+85	°C	
		-40		+85	°C	
Maximum Supply Voltage	V _{cc}	0		3.6	V	
Relative Humidity(Non-condensing)	RH	0		85	%	

Electrical Characteristics (VCC = 3.135 to 3.465 Volts)

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Supply Voltage	V _{cc}	3.14	3.30	3.47	V	
Supply Current	I _{cc}			300	mA	
				300	mA	
				300	mA	
Power Consumption	P			1	W	
				1.2	W	
				1.2	W	
Data Rate	R	24.3		26.5	Gb/s	
Fiber Length	L			10	KM	
Transmitter Section:						
Input differential impedance	R _{in}		100		Ω	1
Differential input voltage swing	V _{in,pp}	180		450	mV	2
Transmit Disable Voltage	V _D	2		V _{cc}	V	3
Transmit Enable Voltage	V _{EN}	V _{ee}		V _{ee} +0.8	V	
Receiver Section:						
Single Ended Output Voltage Tolerance	V	-0.3		4	V	
Rx Output Diff Voltage	V _o	180		450	mV	
LOS Fault	V _{LOS fault}	2		V _{ccHOS} _T	V	4
LOS Normal	V _{LOS norm}	V _{ee}		V _{ee} +0.8	V	4

Note:

1. Connected directly to TX data input pins. AC coupling from pins into laser driver IC.
2. Per SFF-8431 Rev 3.0
3. Into 100 ohms differential termination.
4. LOS is an open collector output. Should be pulled up with 4.7k – 10kΩ on the host board. Normal operation is logic 0; loss of signal is logic 1. Maximum pull-up voltage is 5.5V.

Optical Characteristics (VCC = 3.135 to 3.465 Volts)

Parameter	Symbol	Min	Typical	Max.	Unit	Note
Transmitter Section:						
Center Wavelength	λ_t	1251	1271	1291	nm	
		1311	1331	1351	nm	
spectral width(-20dB)	$\Delta \lambda$			1	nm	
Average Optical Power	Pavg	-5		2	dBm	1
Laser Off Power	Poff			-30	dBm	
Side Mode Suppression Ratio		30				
Extinction Ratio	ER	3.5			dB	
Optical Return Loss Tolerance				-12	dB	
Receiver Section:						
Center Wavelength	λ_r	1311	1331	1351	nm	
		1251	1271	1291	nm	
Receiver Sensitivity	Sen			-9	dBm	2
Los Assert	LOS _A	-30		-	dBm	
Los Dessert	LOS _D			-16	dBm	
Los Hysteresis	LOS _H	0.5			dB	
Overload		2			dBm	

Note:

1. Average power figures are informative only, per IEEE802.3cc.
2. Receiver sensitivity is informative. Shall be measured with conformance test signal for . BER =5x 10⁻⁵


Timing Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit
TX_Disable Assert Time	t_off			100	us
TX_Disable Negate Time	t_on			2	ms
Time to Initialize 2-wire interface	t_2w_start_up			300	ms
Time to Initialize	t_start_up			300	ms
Time to Initialize cooled module and time to power up a cooled module to Power level II	t_start_up_cooled			90	s
Time to Power Up to Level II	t_power_level2			300	ms
Time to Power Down from Level II	t_power_down			300	ms
Tx_Fault assert	Tx_Fault_on			1	ms
Tx_Fault assert for cooled module	Tx_Fault_on_cooled			50	ms
TX_FAULT Reset	t_reset	10			us
Rx_LOS assert delay	t_los_on			100	us
Rx_LOS negate delay	t_los_off			100	us


Digital Diagnostic Specifications

Parameter	Symbol	Units	Min	Max	Accuracy	Note
Transceiver Temperature	DDDTemp	°C	-40	+85	±5°C	
			0	70	±5°C	
Transceiver Supply Voltage	DDDVoltage	V	3.15	3.45	±3%	
Transmitter Bias Current	DDDBias	mA	0	35	±10%	
Transmitter Output Power	DDDTx-Power	dBm	-5	+5	±3dB	
Receiver Average Optical Input Power	DDDRx-Power	dBm	-16	-3	±3dB	

Transceiver Block Diagram

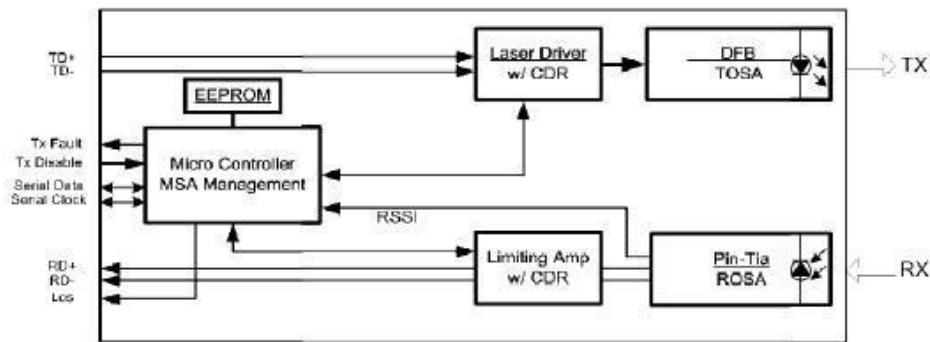


Recommended Circuit:

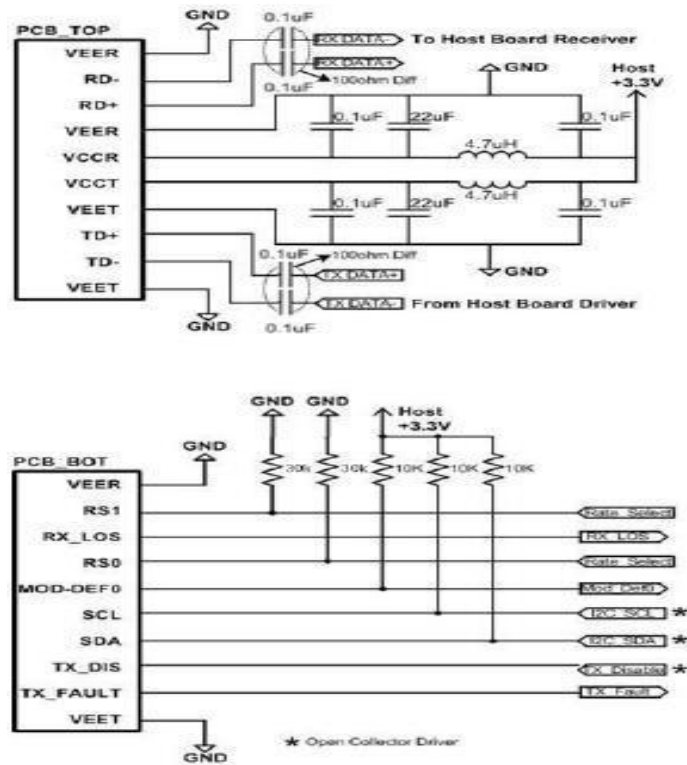

Recommended High-speed Interface Circuit

Mechanical Dimensions:

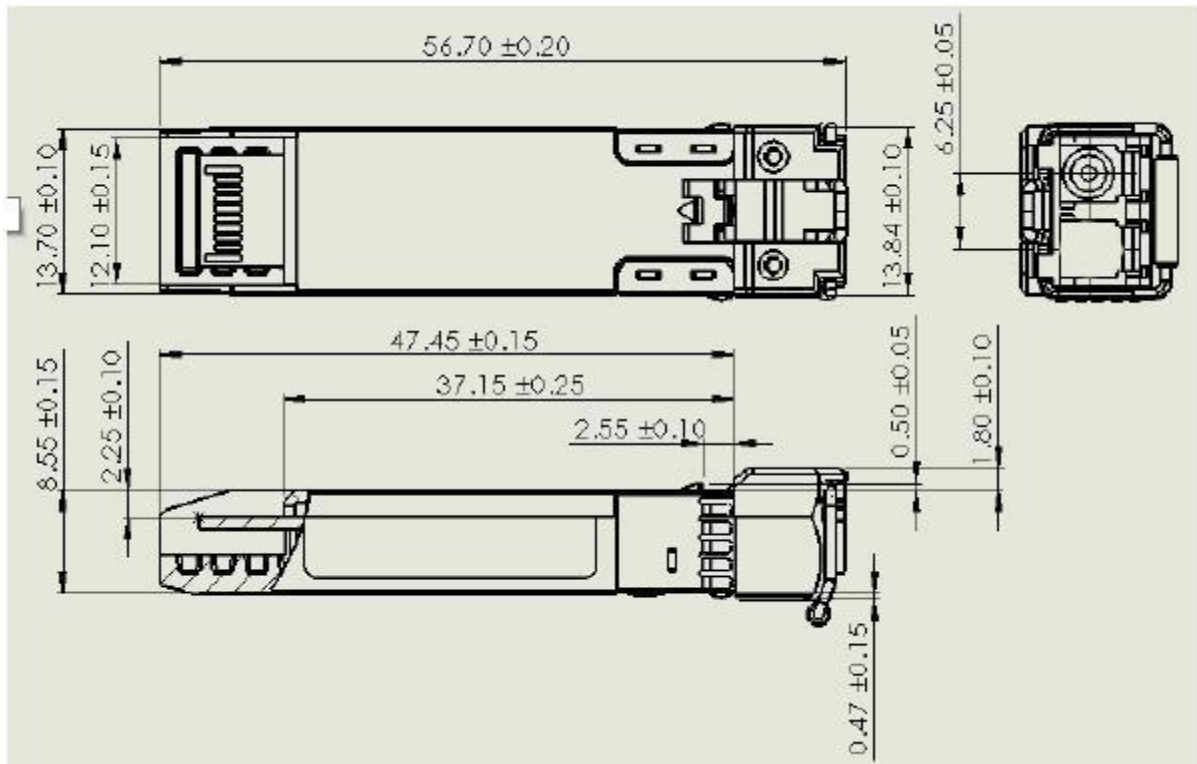

Shenzhen GLight Communication Technology Co., Ltd.

Building 3, ChaoHuiLou Technology Industrial Park, No.119 Huating Road,
Dalang Sub-district, Longhua District, Shenzhen, China

GLIGHT reserves the right to make changes to the products or information contained herein without notice.

No liability is assumed as a result of their use or application.

No rights under any patent accompany the sale of any such products or information.

Published by Shenzhen GLight Communication Technology Co., Ltd. Copyright © GLight Communication Technology Co., Ltd. All Rights Reserved.